



# HAMMER HEAD TYPE TOPKIT TOWER CRANE TC7017




## 外形尺寸 Dimensions

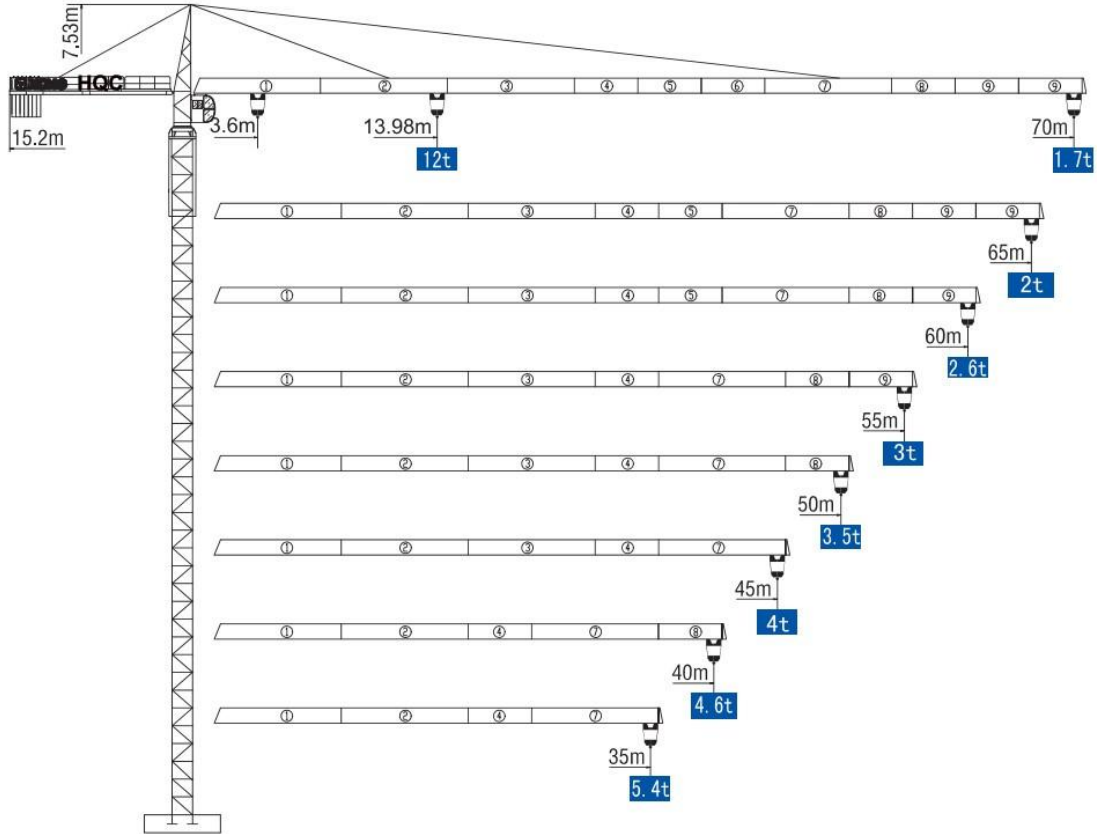

## 技术状态 Status

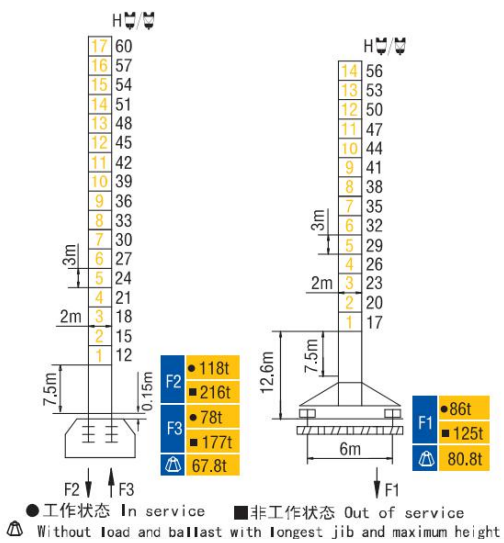

## 附着 Anchorages

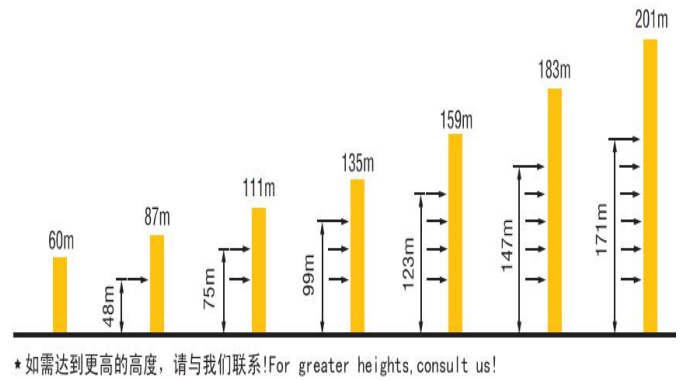

## 起重特性 Load Diagrams

起重臂 (m) Jib	R <sub>min</sub>	R (C <sub>max</sub> )	C <sub>max</sub>	幅度 (m) Range												
				15	20	25	30	35	40	45	50	55	60	65	70	
70m		4.4	25.64	6t	6000			4996	4161	3540	3059	2677	2365	2106	1887	1700
		3.6	13.98	12t	11037	7802	5909	4667	3788	3135	2630	2227	1899	1627	1397	1200
65m		4.4	27.2	6t	6000			5355	4467	3807	3296	2889	2558	2282	2050	
		3.6	14.72	12t	11734	8316	6317	5004	4077	3386	2852	2427	2081	1793	1550	
60m		4.4	30	6t	6000			5018	4287	3722	3272	2905	2600			
		3.6	16.08	12t	12000	9266	7070	5628	4609	3850	3264	2797	2416	2100		
55m		4.4	30.77	6t	6000			5169	4419	3838	3377	3000				
		3.6	16.42	12t	12000	9503	7258	5783	4742	3966	3367	2889	2500			
50m		4.4	31.67	6t	6000			5347	4574	3976	3500					
		3.6	16.46	12t	12000	9531	7280	5802	4757	3980	3379	2900				
45m		4.4	31.83	6t	6000			5378	4601	4000						
		3.6	16.86	12t	12000	9811	7502	5986	4914	4117	3500					
40m		4.4	31.83	6t	6000			5377	4600							
		3.6	16.81	12t	12000	9777	7475	5963	4895	4100						
35m		4.4	31.95	6t	6000			5400								
		3.6	16.83	12t	12000	9786	7482	5969	4900							

## 传动机构 Mechanisms

机构 Mechanisms	图例 Example	机构代号 Model	速度 (m/min) Speed	起重量 (t) Hoist Weight	容绳量 (m) Rope Capacity	功率 Power	
起升 Hoisting		55LVF30		45	6	632 >632*	55kW
				90	3		
				22.5	12		
				45	6		
变幅 Trolleying		6DVF	0~63m/min			5.5kW	
		120JXL				120N.m	
回转 Slewing		15RVF	0~0.7r/min			2×7.5kW	
		RCV240				2×120N.m	
行走 Travelling		RT443	12.5/25m/min			4×1.7/3.4kW	
电源 Main supply					~380V (±10%) 50Hz		
总功率 (不含顶升和行走) Gross power (excluding top-lifting and travelling)					75.5/65.5/71.5kW		

## 配重配置 Ballast

Counter-jib ballast		4150 (kg) / 3500 (kg) / 2000 (kg)			
			PZ4150	PZ3500	PZ2000
70m	15.2m	26250	5	1	1
65m	15.2m	24250	5	1	0
60m	15.2m	22750	5	0	1
55m	15.2m	20100	4	1	0
50m	15.2m	18600	4	0	1
45m	15.2m	16600	4	0	0
40m	15.2m	13800	2	1	1
35m	15.2m	12450	3	0	0