



HAMMER HEAD TYPE TOPKIT TOWER CRANE TC7015




外形尺寸 Dimensions



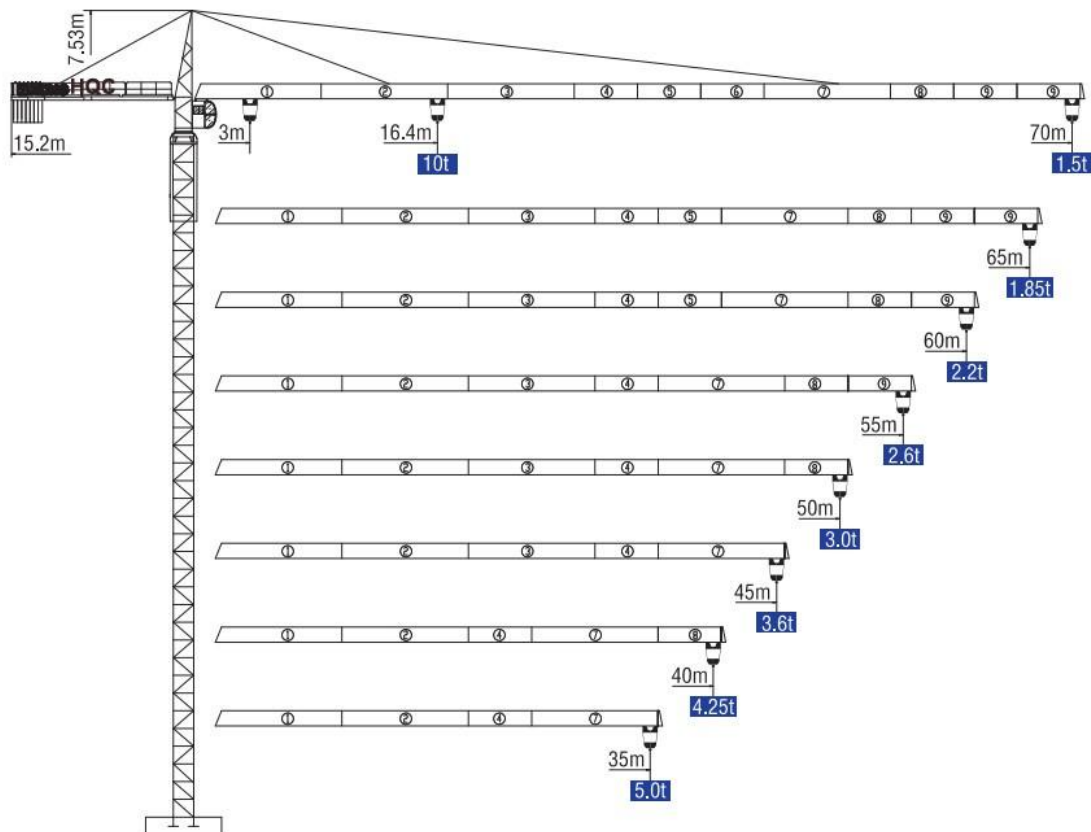

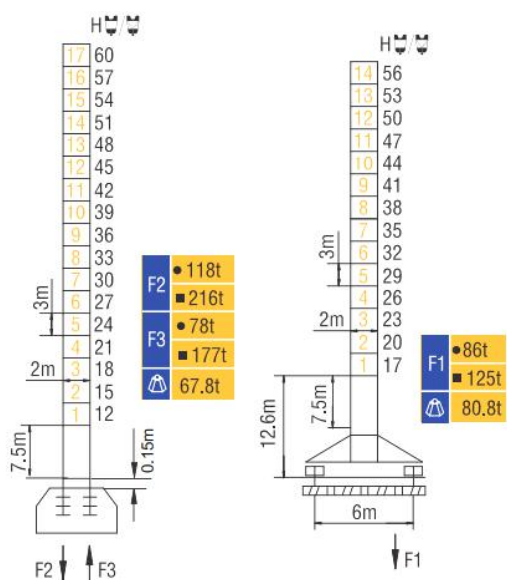



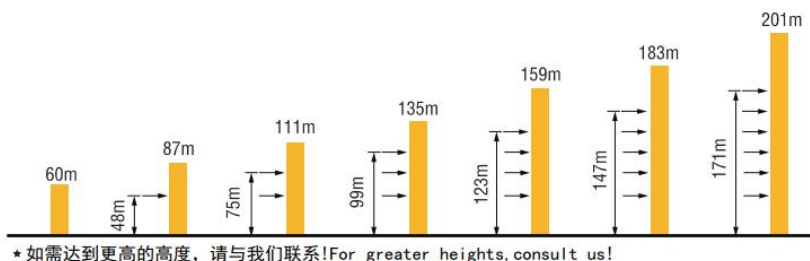









技术状态 Status









附着 Anchorages






起重特性 Load Diagrams

起重臂 (m) jib	R _{min}	R(C _{max})	C _{max}	幅度 (m) Range											
				20	25	30	35	40	45	50	55	60	65	70	
70m		3	29.6	5t	5000		4912	4047	3404	2907	2511	2188	1920	1693	1500
		3	16.4	10t	7900	6034	4810	3946	3303	2806	2410	2087	1819	1593	1400
65m		3	31.3	5t	5000			4342	3661	3134	2715	2373	2089	1850	
		3	17.3	10t	8427	6451	5155	4240	3560	3033	2614	2273	1989	1750	
60m		3	32.3	5t	5000			4534	3828	3282	2848	2494	2200		
		3	17.9	10t	8770	6723	5380	4432	3727	3182	2748	2394	2100		
55m		3	33.3	5t	5000			4702	3974	3412	2965	2600			
		3	18.4	10t	9071	6961	5578	4601	3874	3312	2865	2500			
50m		3	33.6	5t	5000			4753	4019	3452	3000				
		3	18.6	10t	9162	7034	5638	4652	3918	3351	2900				
45m		3	34.7	5t	5000			4945	4186	3600					
		3	19.2	10t	9506	7306	5863	4844	4086	3500					
40m		3	35.1	5t	5000				4250						
		3	19.4	10t	9637	7410	5949	4917	4150						
35m		3	35	5t	5000										
		3	19.5	10t	9695	7456	5987	4950							

传动机构 Mechanisms

机构 Mechanisms	图例 Example	机构代号 Model	速度 (m/min) Speed	起重量 (t) Hoist Weight	容绳量 (m) Rope Capacity	功率 Power	
起升 Hoisting		45LVF25		40	5	615 >615*	45kW
				80	2.5		
				20	10		
				40	5		
变幅 Trolleying		95BL70	0~58m/min			95N.m	
		4DVF	0~58m/min			4kW	
回转 Slewing		RCV240	0~0.68r/min			2×120N.m	
电源 Main supply					380V/440V +/-10% ; 50/60Hz		
总功率 (不含顶升和行走) Gross power (excluding top-lifting and travelling)					70/60/52kW		

配重配置 Ballast

Counter-jib ballast		4150(kg) / 3500(kg) / 2000(kg)			
		 (kg)	PZ4150	PZ3500	PZ2000
70m	15.2m	26250	5	1	1
65m	15.2m	24250	5	1	0
60m	15.2m	22750	5	0	1
55m	15.2m	20100	4	1	0
50m	15.2m	18600	4	0	1
45m	15.2m	16600	4	0	0
40m	15.2m	13800	2	1	1
35m	15.2m	12450	3	0	0