



HAMMER HEAD TYPE TOPKIT TOWER CRANE TC7050

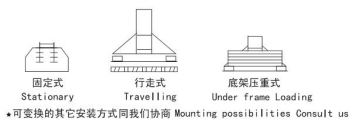


外形尺寸 Dimensions

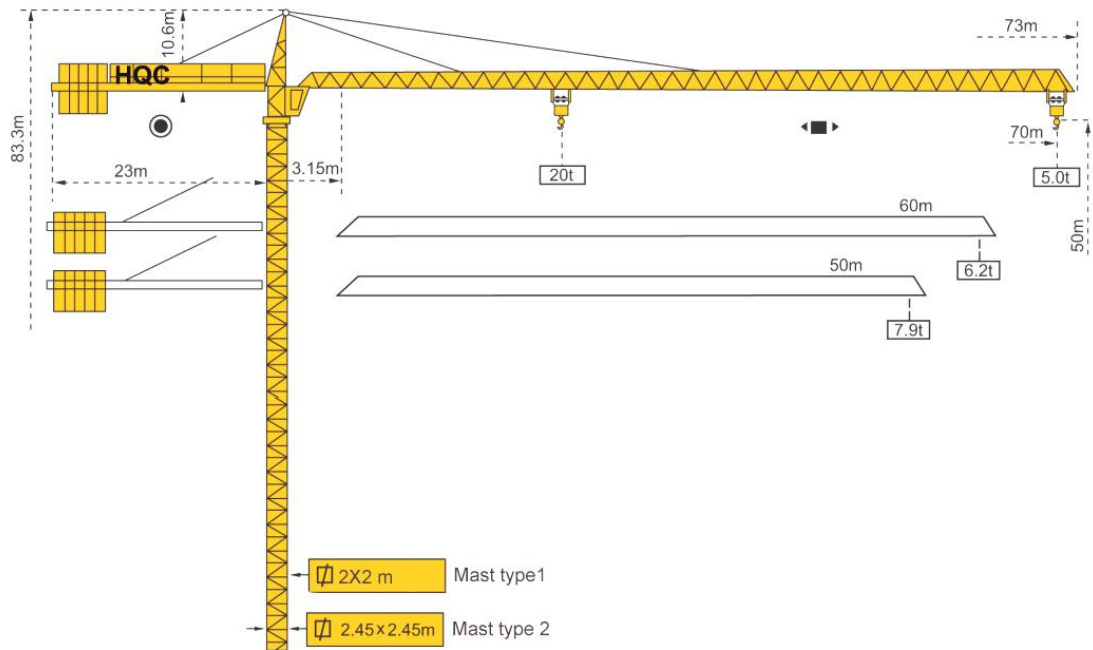




技术状态 Status

For 2.45x2.45 mast

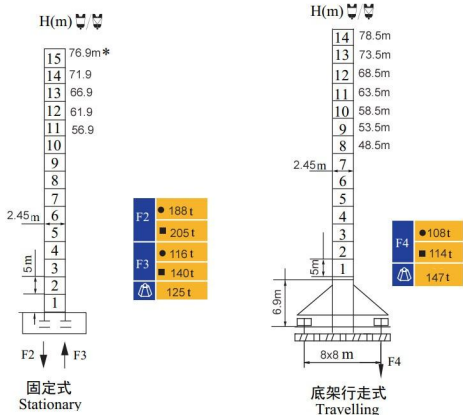

附着 Anchorages

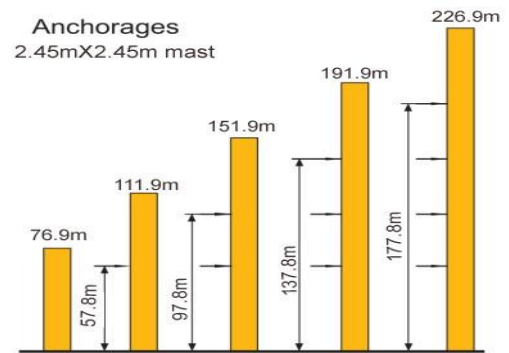

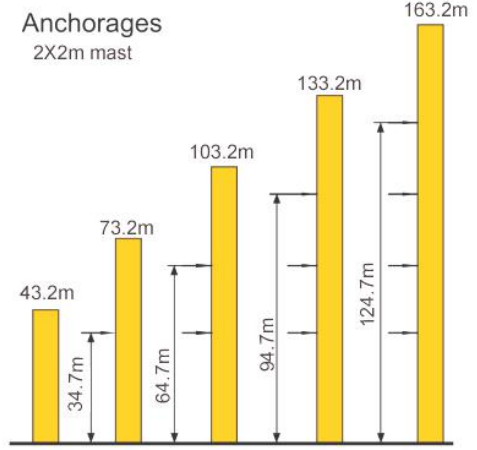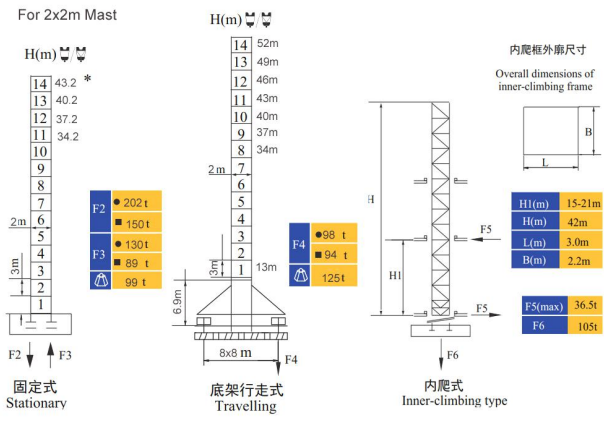

起重特性 Load Diagrams

| 起重臂 (m) Jib | R _{min} | R (C _{max}) | C _{max} | 幅度 (m) Range | | | | | | | | | | | | |
|----------------|------------------|-----------------------|------------------|--------------|-------|-------|-------|-------|-------|-------|------|------|------|------|------|------|
| | | | | 15 | 20 | 25 | 30 | 35 | 40 | 45 | 50 | 55 | 60 | 65 | 70 | |
| 70m | | 3.9m | 40.2m | 10000 | 10000 | | | | 10000 | 10000 | 8950 | 7900 | 6980 | 6200 | 5500 | 5000 |
| | | 3.9m | 22.4m | 20000 | 20000 | 17100 | 14300 | 11900 | 10500 | 8550 | 7550 | 6580 | 5850 | 5150 | 4650 | |
| 60m | | 3.9m | 40.2m | 10000 | 10000 | | | | 10000 | 10000 | 8950 | 7900 | 6980 | 6200 | | |
| | | 3.9m | 22.4m | 20000 | 20000 | 17100 | 14300 | 11900 | 10500 | 8550 | 7550 | 6580 | 5850 | | | |
| 50m | | 3.9m | 40.2m | 10000 | 10000 | | | | 10000 | 10000 | 8950 | 7900 | | | | |
| | | 3.9m | 22.4m | 20000 | 20000 | 17100 | 14300 | 11900 | 10500 | 8550 | 7550 | | | | | |
| 40m | | 3.9m | 40.2m | 10000 | 10000 | | | | | | | | | | | |
| | | 3.9m | 22.4m | 20000 | 20000 | 17100 | 14300 | 11900 | 10500 | | | | | | | |

传动机构 Mechanisms

| 机构 Mechanisms | 图例 Example | 机构代号 Model | 速度 (m/min) Speed | 起重量 (t) Hoist Weight | 容绳量 (m) Rope Capacity | 功率 Power | |
|------------------------------------------------------------------|---------------|---------------|---------------------|-------------------------|--------------------------|-------------|------|
| 起升 Hoisting | | 120LVF50 | φ11 | 45 | 10 | >650* | 90KW |
| | | | | 90 | 5 | | |
| | | | φ12 | 22.5 | 20 | | |
| | | | | 45 | 10 | | |
| 变幅 Trolleying | | X185K | 0~63m/min | | | 185Nm | |
| | | DVF185 | | | | 185Nm | |
| 回转 Slewing | | RCV185 | 0~0.7r/min | | | 3X185Nm | |
| | | RVF185 | | | | 3X185Nm | |
| 行走 Travelling | | 42TVF | 0-34 m/min | | | 6X5.2 kW | |
| 电源 Main supply | | | | | 380V/50HZ | 440V/60HZ | |
| 总功率 (不含顶升和行走) Gross power (excluding top-lifting and travelling) | | | | | | 150KVA | |